

## SPECIFICATION


Modular vinyl floor covering, with glass fibre reinforcement(CLICK). Polyurethane reinforcement. In plank format, with bevelled edges. Product standard: EN ISO 10582.

CERTIFICATION & CLASSIFICATION	STANDARDS	ARTIC 0.3mm	ARTIC 0.5mm	ARTIC 0.7mm
Type of floor covering	EN ISO 10582	Compact resilient floor covering	Compact resilient floor covering	Compact resilient floor covering
CE certification	EN 14041	Yes	Yes	Yes
Classification	EN ISO 10874	Residential: 21	Residential: 21	Residential: 21
		Commercial: 31	Commercial: 32	Commercial: 33
		-	Industrial: 42	Industrial: 42
TECHNICAL PERFORMANCES	STANDARDS	ARTIC 0.3mm	ARTIC 0.5mm	ARTIC 0.7mm
Dimensional stability	EN ISO 23999	≤ 0.10 %	≤ 0.10 %	≤ 0.10 %
Reaction to fire	EN 13501-1	Bfl s1 on concrete and Cfl s1 on wood substrate	Bfl s1 on concrete and Cfl s1 on wood substrate	Bfl s1 on concrete and Cfl s1 on wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm	≤ 0.05 mm	≤ 0.05 mm
Furniture leg	EN 424	No damage	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 2 mm	≤ 2 mm	≤ 2 mm
Underfloor heating	EN ISO 10456	Suitable – max. 27°C	Suitable – max. 27°C	Suitable – max. 27°C
Thermal resistance	ISO 10456	0.03 m2 K/W	0.03 m2 K/W	0.03 m2 K/W
Impact sound reduction	EN ISO EN 717-2	ΔLw = 2 dB	ΔLw = 2 dB	ΔLw = 2 dB
Reduction of in room impact noise	NF EN ISO 31-074	Class C (Ln,e,w < 85dB)	Class C (Ln,e,w < 85dB)	Class C (Ln,e,w < 85dB)
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6
Resistance to chemicals	EN ISO 26987	High resistance	High resistance	High resistance
Slip resistance	EN 13893	μ ≥ 0.30	μ ≥ 0.30	μ ≥ 0.30
	DIN 51130	R9	R9	R9
Electrical properties	EN 1015	≤ 2kV on concrete	≤ 2kV on concrete	≤ 2kV on concrete
	EN 1081	> 109 Ω	> 109 Ω	> 109 Ω
Adhesion wear layer	EN 431	≥ 50N / 50mm	≥ 50N / 50mm	≥ 50N / 50mm
Colours		10	10	10

## PACKING

	Dry back			Click					
	7x48 inch	6x48 inch	6x36 inch	7x48 inch			6x48 inch		
Plank Size	189x1229mm	152.4x1219mm	152.4x914.4mm	180x1220mm			150x1220mm		
Thickness	3.0mm			3.2mm	4.2mm	5.0mm	3.2mm	4.2mm	5.0mm
Wear Layer	0.2mm / 0.3mm / 0.5mm			0.2mm / 0.3mm / 0.5mm / 0.7mm					
Pcs/Box	14	18	24	14	10	8	16	12	10
Sqm/Box	3.2519	3.344	3.344	3.0744	2.196	1.7568	2.928	2.196	1.83
Weight/Box	18.5kg	19kg	19kg	18.8kg	18kg	17.3kg	17.8kg	18kg	18.5kg
Box/Plt	70	66	66	70	70	75	72	72	72
Plt/Cntr	20	20	20	20	20	20	20	20	20



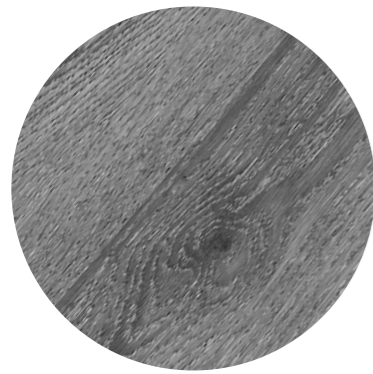

# ARTIC

## NEW COLLECTION


### 4 COLOURS / 2 SIZES

**DRY BACK**  
152.4x1219mm / 6x48 inch  
184x1219mm / 7x48 inch

**CLICK**  
150x1220mm / 6x48 inch  
180x1220mm / 7x48 inch

### PACKING INFORMATION

PLANK SIZE	180x1220mm / 7x48 inch
THICKNESS	5.5mm
PCS/BOX	8
SQM/BOX	1.7568
WEIGHT/BOX	17.3kg

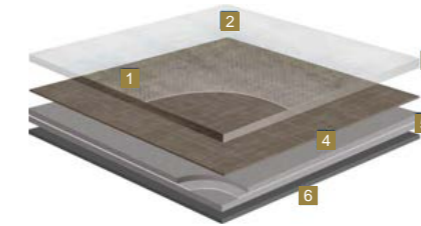

### A lifetime of sustainable flooring

- 100% recyclable.
- Contributes to improved indoor air quality with VOC emissions below quantifiable level, less than 10ug/m3 after 28 days.
- Uses a phthalate-free technology, based on alternative plasticizers that can be used for sensitive applications such as the production of toys, food packaging and medical devices.

- 1 Surface embossing & textures:**  
*close to real materials*
- 2 UV reinforcement:**  
*extreme resistance and easy low-cost maintenance*
- 3 0.3/0.5/0.7mm pure PVC transparent wear layer:**  
*exceptionally hardwearing and indentation resistant*
- 4 4 colours options in high definition printing;**  
*with great customisation possibilities*
- 5 Unique composite structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre:**  
*exceptional dimensional stability and excellent resistance to tear and indentation*
- 6 PVC backing**



GREIGE



GREY



MIELE



TABACCO



MIELE  
180x1220mm / 7x48 inch