

SPECIFICATION

Modular vinyl floor covering, with glass fibre reinforcement(**click). Polyurethane reinforcement. In tile format, with bevelled edges. Product standard: EN ISO 10582.

CERTIFICATION & CLASSIFICATION	STANDARDS	SUITE 0.3mm	SUITE 0.5mm
Type of floor covering	EN ISO 10582	Compact resilient floor covering	Compact resilient floor covering
CE certification	EN 14041	Yes	Yes
Classification	EN ISO 10874	Residential: 21	Residential: 21
		Commercial: 31	Commercial: 33
		-	Industrial: 42

TECHNICAL PERFORMANCES	STANDARDS	SUITE 0.3mm	SUITE 0.5mm
Dimensional stability	EN ISO 23999	≤ 0.10 %	≤ 0.10 %
Reaction to fire	EN 13501-1	Bfl s1 on concrete and Cfl s1 on wood substrate	Bfl s1 on concrete and Cfl s1 on wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.05 mm	≤ 0.05 mm
Furniture leg	EN 424	No damage	No damage
Castor chair	EN ISO 4918	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 2 mm	≤ 2 mm
Underfloor heating	EN ISO 10456	Suitable – max. 27°C	Suitable – max. 27°C
Thermal resistance	ISO 10456	0.03 m2 K/W	0.03 m2 K/W
Impact sound reduction	EN ISO EN 717-2	ΔLw = 2 dB	ΔLw = 2 dB
Reduction of in room impact noise	NF EN ISO 31-074	Class C (Ln,e,w < 85dB)	Class C (Ln,e,w < 85dB)
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Resistance to chemicals	EN ISO 26987	High resistance	High resistance
Slip resistance	EN 13893	μ ≥ 0.30	μ ≥ 0.30
	DIN 51130	R9	R9
Electrical properties	EN 1015	≤ 2kV on concrete	≤ 2kV on concrete
	EN 1081	> 109 Ω	> 109 Ω
Adhesion wear layer	EN 431	≥ 50N / 50mm	≥ 50N / 50mm
Colours		10	10

PACKING

	Dry back		Click(Välinge 5G) 	
	7.25x60 inch	9x60 inch	7.25x60 inch	9x60 inch
Plank Size	184.2x1515mm	228.6x1525mm	184.2x1515mm	228.6x1525mm
Thickness	3.0mm		8.5mm	8.5mm
Wear Layer	0.3/0.5mm		0.3/0.5mm	0.3/0.5mm
Pcs/Box	10		4	4
Sqm/Box	2.80	3.486	1.09	1.333
Weight/Box	15kg	18.75kg	11.5kg	13.5kg
Box/Plt	60		60	60
Plt/Cnr	18		18	18

MAXIFLOOR
LIVE YOUR SPACE

ADD: Calle La Cosa 18 12200 ONDA Castellón-España
TEL: +34 964 603 425 FAX: +34 964 602 688
WEB: www.maxifloor.es http://goo.gl/YD1i8d

CARBON
228.6x1525mm / 9x60 inch






SUITE-COREmax-XL

6 COLOURS
228.6x1525mm / 9x60 inch
DRY BACK/CLICK
COREmax Vallinge 5G

[E.I.R]

PACKING INFORMATION	
PLANK SIZE	228.6x1525mm/9x60inch
THICKNESS	8.5mm
PCS/BOX	4
SQM/BOX	1.333
WEIGHT/BOX	13.5kg

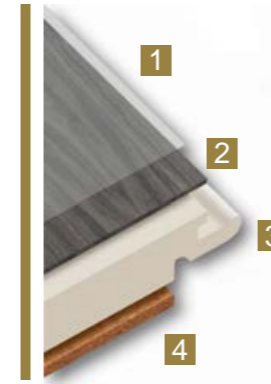

The Construction of COREmax PLUS

- 1 Wear layer(0.5mm/20 mil)**
 - protects against excessive wear
 - provides superior cleanability
 - provides superior stain resistance
 - rated for commercial traffic
- 2 Luxury Vinyl Top Layer**
 - durable, resilient
 - resist chips & dents
 - virgin vinyl
- 3 COREmax Core Structure**
 - extruded waterproof core
 - stable - will not expand or contract under normal conditions
 - glueless profile
- 4 Attached Cork Underlayment**
 - provides added sound insulation
 - no need for separate underlayment
 - naturally resists mold & mildew
 - absorbs subfloor imperfections



CREMA

MOKKA

NATURALLE

CINZA

GOLD

CARBON